

Wheatbelt Inc.

Rolling Shutters

300 Industrial Road • Hillsboro, Kansas 67063 • 800-264-5171 • 620-947-2323 • Fax: 620-947-3053 • roger@rollupshutter.com • www.rollupshutter.com



In Soffit Installation

Wheatbelt, Inc. has been producing rolling shutters since 1981. In addition to window shutters we custom build shutters for special applications as listed below.

Our shutters are made with roll formed aluminum with a foam core or extruded aluminum. We use powder coated extrusions, polyurethane coated slat and stainless hardware for a long lasting product.



Outdoor Kiosk

ROLLING SHUTTERS FOR:

- Windows
- Doors
- Skylights
- Kiosks
- Serving Windows
- Pool houses
- Screen Porches
- Inside and Outside Storage
- Media Rooms
- Outdoor TVs

PROTECTION FROM: CONTROLLED BY:

Sun
Wind
Cold
Leaks
Condensation
Noise
Vandals
Fading

Strap
Crank
Push Up
Electric
Electric Remote Control



Business Protection



Covering Storage Shelves



Push-Pull Shutter on Sunroom Roof



Bottom Shutter with Custom Storage



Surface-Mounted Coverings



Shutter Behind Glass



Serving Counter – Open



Outside Storage – Closed



Outside Storage – Open

Wheatbelt Inc.

Rolling Shutters Control Methods

300 Industrial Road • Hillsboro, Kansas 67063 • 800-264-5171 • 620-947-2323 • Fax: 620-947-3053 • roger@rollupshutter.com • www.rollupshutter.com



Strap Exit Guide



Strap Recoil Box



Strap Assist Crank



(Top) Slide Bolts

(Bottom) Key Lock



Remote Transmitter - 5 Channel

Electronic Controls by Somfy

- Traditional paddle, toggle or RTS remote switch
- With the RTS remote system a group of motors can be operated individually or in groups
- An intermediate, top, and bottom setting is possible
- Motors can lift multiple panels



Folded Crank




Crank Handle

Wheatbelt Inc.

Rolling Shutters Slat Designs 2013

300 Industrial Road • Hillsboro, Kansas 67063 • 800-264-5171 • 620-947-2323 • Fax: 620-947-3053 • roger@rollupshutter.com • www.rollupshutter.com

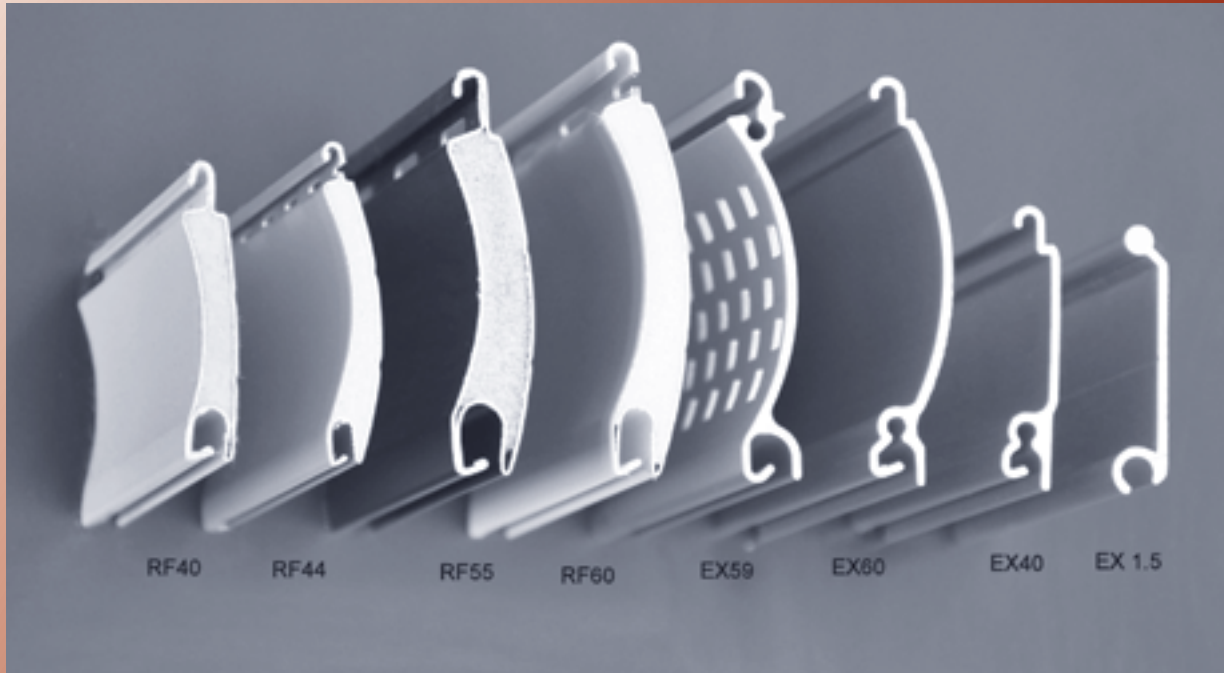

PVC slat is no longer produced. Limit repair supply available. Roll formed with foam core slat can interchange with PVC

SLAT STYLE	RF40	RF44	RF55	RF60	EX59	NEW EX60	EX40	EX1.5
Roll formed aluminum with foam core	x	x	x	x				
Extruded aluminum					x	x	x	x
aluminum thickness	0.017	0.014	0.019	0.014	0.078	0.058	0.055	0.053
Weight per sq. ft.	0.9	0.6	1.045	0.8	1.6	1.35	1.5	1.5
Maximum sq. ft. for non-wind areas	80	45	105	80	120	120	80	80
Rail width x depth 2.125 x .875	x	x			x		x	x
Rail width x depth 2.3125 x 1.125			x	x	x	x		
Rail width x depth 3 x 1.125 option			x	x	x	x		
Sun protection and low wind area	x	x						
Medium wind and security	x			x				
High security and wind			x			x		
Serving counters	x		x	x	x	x	x	
Punched slat					x			
Special application	x				x		x	x

Colors	RF40	RF44	RF55	RF60	EX59	EX60	EX40	EX1.5
White	x	x	x	x	x	x		
Dark Bronze	x	x	x	x	x			
Gray	x	x	x	x				
Attica Beige (mauve)	x	x	x	x		x		
Arizona Beige (almond)	x		x					
Metallic	x		x					
Clear anodized					x	x	x	x
call factory for actual samples								

Box Size vs. Rail Height	Box Size	RF40	RF44	RF55	RF60	EX59	EX60	EX40	EX1.5
6" sq		38	56		30		43	60	
7" sq		69	96	30	50	54	71	93	69
8" sq		105	112	60	72	96	94	121	105
9" sq		126	141	82	91	123	130		126
10" sq				103	114	168	160		
11" sq				128	172				

Maximum shutter size varies with security and wind conditions. Contact Factory.